
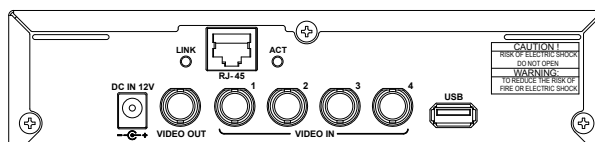


Features

- MJPEG Video compression
- Max. 120 images per second recording
- Quad and each record image siz
- Various recording modes of manual, schedule and motion detection
- 750GB SATA HDD support-SATA converter(option)
- TCP/IP network connection with DHCP and Dynamic DNS support (option)
- USB buck up

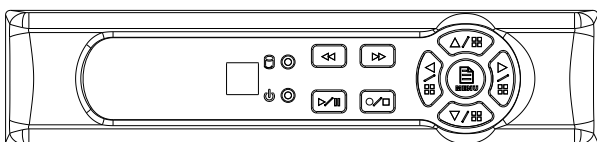

Model No.		RYK-9822/N
Video	Format	NTSC / EIA or PAL / CCIR
	Compression	MJPEG
	Input	4 CH, BNC
	Output	1 CH BNC
Display	Resolution	720x480 (NTSC), 720x576 (PAL)
	Frame Rate	Max. 120 / 100 IPS (NTSC / PAL)
	Division	Single, Quad
Recording	Resolution	Max. 640x224 (NTSC), 640x272 (PAL)
	Frame Rate	Max. 120 / 100 IPS (NTSC / PAL)
	Quality	High / Normal / Low
	Mode	Manual / Schedule / Motion Detection
HDD	Basic Storage	1x3.5" IDE HDD (Max. 500GB)
Alarm	Input / Output	--
	Triggered Mode	Motion Detection, Video Loss
	Action	Recording, Sound Alert
Network	Ethernet	10/100 BaseT Ethernet (RJ-45) (for RYK-9822N)
	Protocol	TCP/IP, PPPoE, DDNS, SMTP, ICMP, ARP (for RYK-9822N)
Backup Device		USB
Post Alarm		1 ~ 60 sec
Search Method		By Date, Time, Event
Password Protection		Yes
Power Supply		AC100~240V 50/60 Hz, DC12V / 2.5A
Weight		2.5 Kg (without HDD)
Dimensions (WxHxD)		195X45X226mm
Operating Environment		30 ~ 80% RH, 5°C ~ 40°C (41°F ~ 104°F)
Remote Control		IR Transmission

■ IPS: Images Per Second